


## Dimensions



Security Seals

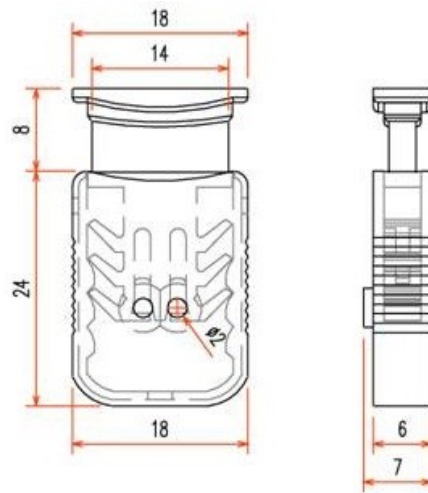

## Specifications

Material :  
Housing - Polycarbonate  
Insert - High Impact Polystyrene

## Packaging

Product	Carton					
	QTY	L (mm)	B (mm)	H (mm)	Volume m <sup>3</sup>	Weight kg
AnchorLock	2000	300	240	170	0.0120	7.3

## Applications



1. Insert wire from the back of the seal.



2. Ensure that the wire is inserted through the anchor of the seal.



3. Press down the anchor of the seal and ensure that there are 2 clicks.



4. Use cutting tool to cut off additional wire at the front of the seal to prevent injury.



5. Illustration of the correct application of an AnchorLock

## ISC Security Products

Jhr. Mockkade 27 • 2181 AL HILLEGOM NL

T. +31 252 750480 • E. [info@security-seals.global](mailto:info@security-seals.global) • W. [www.security-seals.global](http://www.security-seals.global)